

### Features

- Output current is 1A
- Range of operation input voltage: 15V
- Line regulation: 0.03%/V (typ.)
- Standby current: 2mA (typ.)
- Load regulation: 0.2%/A (typ.)
- Environment Temperature: -20°C~85°C

### Applications

- Power Management for Computer Mother Board, Graphic Card
- LCD Monitor and LCD TV
- DVD Decode Board
- ADSL Modem
- Post Regulators for Switching Supplies

### General Description

HL1117A is a series of low dropout three-terminal regulators with a dropout of 1.3V at 1A load current. HL1117A features a very low standby current 2mA compared to 5mA of competitor.


Other than a fixed version,  $V_{out} = 1.2V, 1.5V, 1.8V, 2.5V, 2.85V, 3.3V,$  and  $5V$ , HL1117A has an adjustable version, which can provide an output voltage from 1.25 to 12V with

only two external resistors.

HL1117A offers thermal shut down function, to assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within 2%. Other output voltage accuracy can be customized on demand, such as 1%.


HL1117A is available in SOT-223, TO-252, SOT-89 power package.

### Typical Application

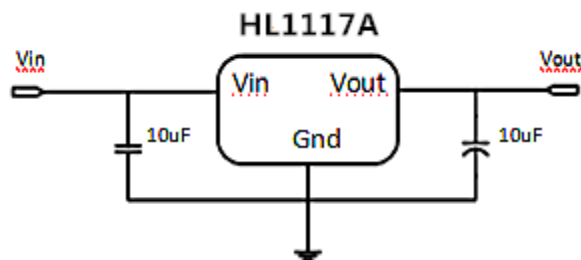

Application circuit of HL1117A fixed version

### Typical Electrical Characteristic

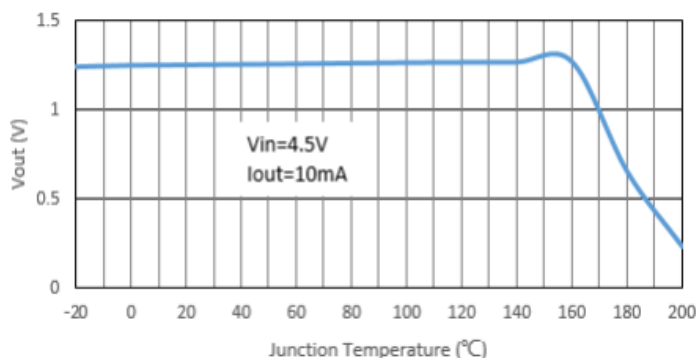



# HL1117A


## 1A Bipolar Linear Regulator

### Selection Table

Marking	Part No.	Output Voltage	Package
HL1117 XXYYWW  xx=Output Voltage(1.2~12.0V)  YYWW= DATE CODE	XX=12	1.2V	SOT-223  TO-252  SOT89
	XX=15	1.5V	
	XX=18	1.8V	
	XX=28	2.85V	
	XX=25	2.5V	
	XX=33	3.3V	
	XX=50	5.0V	
	XX=AD	Adj	

Note: "XX" stands for output voltages. Other voltages can be specially customized

### Selection Guide

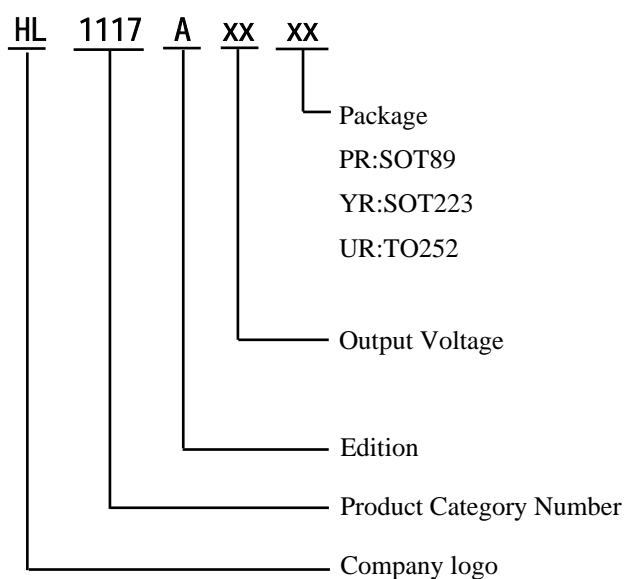




# HL1117A

## 1A Bipolar Linear Regulator

### Block Diagram

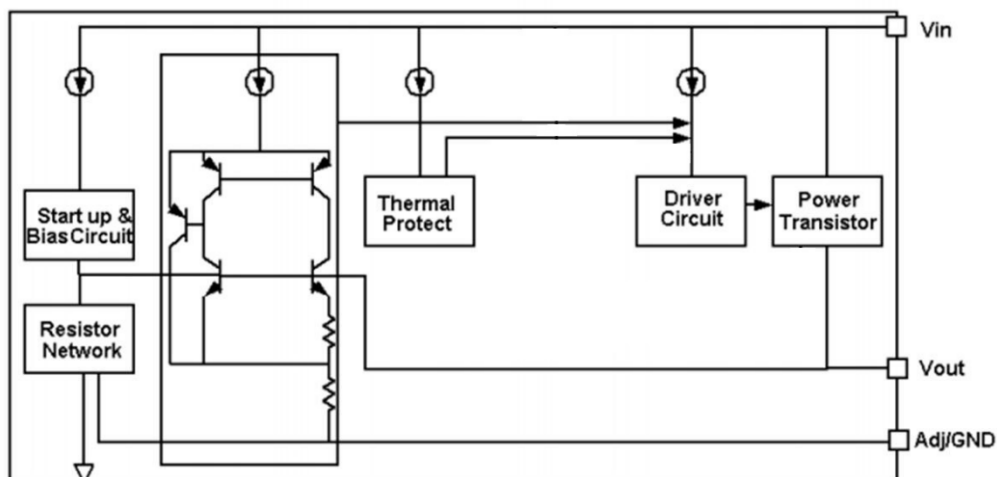

### Pin Configuration

SOT223 (Top View)



Table1: HL1117A series (SOT223 PKG)

PIN NO.	PIN NAME	FUNCTION
1	VSS/ADJ	VSS/ADJ pin
2	VOUT	Output voltage pin
3	VIN	Input voltage pin
4	VOUT	Output voltage pin

TO252 (Top View)




Table2: HL1117A series (TO252 PKG)

PIN NO.	PIN NAME	FUNCTION
1	VSS/ADJ	VSS/ADJ pin
2	VOUT	Output voltage pin
3	VIN	Input voltage pin

SOT89 (TopView)




Table3: HL1117A series (SOT89 PKG)

PIN NO.	PIN NAME	FUNCTION
1	VSS/ADJ	VSS/ADJ pin
2	VOUT	Output voltage pin
3	VIN	Input voltage pin



# HL1117A

## 1A Bipolar Linear Regulator

### Absolute Maximum Ratings

Max Input Voltage ..... 18V

Max Operating Junction Temperature(Tj) ..... 150℃

Ambient Temperature(Ta) ..... -20℃~ 85℃

Storage Temperature(Ts)..... -40℃~150℃

Lead Temperature & Time..... 260℃ 10S

Caution: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

### Electrical Characteristics

T<sub>A</sub>=25℃, unless otherwise noted.

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V <sub>in</sub>	Input voltage		--	15	18	V
V <sub>ref</sub>	Reference voltage	HL1117A-Adj 10mA ≤ I <sub>out</sub> ≤ 1A , V <sub>in</sub> =3.25V	1.225	1.25	1.275	V
V <sub>out</sub>	Output voltage	HL1117A-1.2V 0 ≤ I <sub>out</sub> ≤ 1A , V <sub>in</sub> =3.2V	1.176	1.2	1.224	V
		HL1117A-1.5V 0 ≤ I <sub>out</sub> ≤ 1A , V <sub>in</sub> =3.5V	1.47	1.5	1.53	V
		HL1117A-1.8V 0 ≤ I <sub>out</sub> ≤ 1A , V <sub>in</sub> =3.8V	1.764	1.8	1.836	V
		HL1117A-2.5V 0 ≤ I <sub>out</sub> ≤ 1A , V <sub>in</sub> =4.5V	2.45	2.5	2.55	V
		HL1117A-2.85V 0 ≤ I <sub>out</sub> ≤ 1A , V <sub>in</sub> =4.85V	2.793	2.85	2.907	V
		HL1117A-3.3V 0 ≤ I <sub>out</sub> ≤ 1A , V <sub>in</sub> =5.3V	3.234	3.3	3.366	V
		HL1117A-5.0V 0 ≤ I <sub>out</sub> ≤ 1A , V <sub>in</sub> =7.0V	4.9	5	5.1	V

△V <sub>out</sub>	Line regulation	HL1117A-1.2V I <sub>out</sub> =10mA, 2.7V ≤ V <sub>in</sub> ≤ 10V		4	19	mV
		HL1117A-1.5V I <sub>out</sub> =10mA, 3.0V ≤ V <sub>in</sub> ≤ 10V		5	26	mV
		HL1117A-ADJ I <sub>out</sub> =10mA, 2.75V ≤ V <sub>in</sub> ≤ 12V		5	24	mV
		HL1117A-1.8V I <sub>out</sub> =10mA, 3.3V ≤ V <sub>in</sub> ≤ 12V		5	32	mV



# HL1117A

## 1A Bipolar Linear Regulator

		HL1117A-2.5V $I_{out}=10mA, 4.0V \leq V_{in} \leq 12V$		8	41	mV
		HL1117A-2.85V $I_{out}=10mA, 4.35V \leq V_{in} \leq 12V$		8	46	mV
		HL1117A-3.3V $I_{out}=10mA, 4.8V \leq V_{in} \leq 12V$		9	49	mV
		HL1117A-5.0V $I_{out}=10mA, 6.5V \leq V_{in} \leq 12V$		10	56	mV

$\Delta V_{out}$	Load regulation	HL1117A-1.2V $V_{in} = 2.7V, 10mA \leq I_{out} \leq 1A$		3	8	mV
		HL1117A-1.5V $V_{in} = 3.0V, 10mA \leq I_{out} \leq 1A$		3	8	mV
		HL1117A-ADJ $V_{in} = 2.75V, 10mA \leq I_{out} \leq 1A$		4	8	mV
		HL1117A-1.8V $V_{in} = 3.3V, 10mA \leq I_{out} \leq 1A$		4	12	mV
		HL1117A-2.5V $V_{in} = 4.0V, 10mA \leq I_{out} \leq 1A$		5	16	mV
		HL1117A-2.85V $V_{in} = 4.35V, 10mA \leq I_{out} \leq 1A$		6	20	mV
		HL1117A-3.3 $V_{in} = 4.8V, 10mA \leq I_{out} \leq 1A$		7	24	mV
		HL1117A-5.0 $V_{in} = 6.5V, 10mA \leq I_{out} \leq 1A$		10	36	mV
Vdrop	Dropout voltage	$I_{out} = 100mA$		1.15	1.3	V
		$I_{out} = 1A$		1.3	1.5	V
Imin	Minimum load current	HL1117A-ADJ		2	10	mA
Iq	Quiescent Current	HL1117A-1.2V, $V_{in}=10V$		2	5	mA
		HL1117A-1.5V, $V_{in}=10V$		2	5	mA
		HL1117A-1.8V, $V_{in}=12V$		2	5	mA
		HL1117A-2.5V, $V_{in}=12V$		2	5	mA
		HL1117A-2.85V, $V_{in}=12V$		2	5	mA
		HL1117A-3.3V, $V_{in}=12V$		2	5	mA
		HL1117A-5.0V, $V_{in}=12V$		2	5	mA
Iadj	Adjust pin current	HL1117A-ADJ $V_{in}=5V, 10mA \leq I_{out} \leq 1A$		55	120	uA
Ichange	Iadj change	HL1117A-ADJ		0.2	10	uA



# HL1117A

## 1A Bipolar Linear Regulator

		Vin=5V, 10mA ≤ Iout ≤ 1A				
OTP	Thermal Shutdown	Junction Temperature		+200		°C
	Thermal Shutdown Hysteresis	Junction Temperature		+30		°C
Δ Vout	Temperature coefficient	Vin=4.5V, Iout=10mA VOUT=3.3V 20°C ≤ Ta ≤ 120°C		30		mV
θ JC	Thermal resistance	SOT-223		20		°C/W
		TO-252		10		

Note1: All test are conducted under ambient temperature 25° C and within a short period of time 20ms

Note2: Load current smaller than minimum load current of HL1117A-ADJ will lead to unstable or oscillation output.

### Detailed Description

HL1117A is a series of low dropout voltage, three terminal regulators. Its application circuit is very simple: the fixed version only needs two capacitors and the adjustable version only needs two resistors and two capacitors to work. It is composed of some modules including start-up circuit, bias circuit, bandgap, thermal shutdown, power transistors and its driver circuit and so on.


The thermal shut down modules can assure chip and its application system working safety when the junction temperature is larger than 140°C.

The bandgap module provides stable reference voltage, whose temperature coefficient is compensated by careful design considerations. The temperature coefficient is under 100 ppm/°C. And the accuracy of output voltage is guaranteed by trimming technique.

### Typical Application

HL1117A has an adjustable version and six fixed versions (1.2V, 1.5V, 1.8V, 2.5V, 2.85V , 3.3V and 5V)

#### Fixed Output Voltage Version

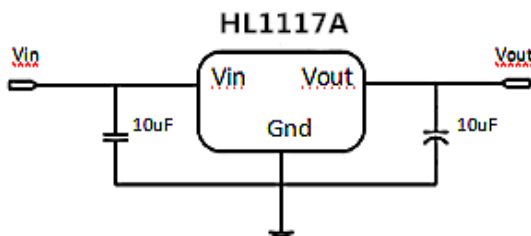

Application circuit of HL1117A fixed version


- 1) Recommend using 10uF tan capacitor as bypass capacitor (C1) for all application circuit.
- 2) Recommend using 10uF tan capacitor to assure circuit stability.



# HL1117A

## 1A Bipolar Linear Regulator

### Adjustable Output Voltage Version

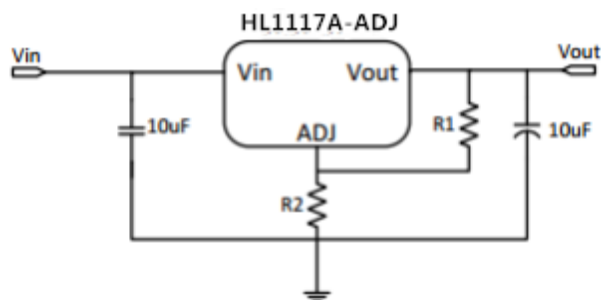

Application Circuit of HL1117A-ADJ

The output voltage of adjustable version follows the equation:  $V_{out} = 1.25 \times (1 + R_2/R_1) + I_{ADJ} \times R_2$ . We can ignore  $I_{ADJ}$  because  $I_{ADJ}$  (about 50uA) is much less than the current of  $R_1$  (about 2~10mA).

1) To meet the minimum load current (>10mA) requirement,  $R_1$  is recommended to be 125ohm or lower. As HL1117A-ADJ can keep itself stable at load current about 2mA,  $R_1$  is not allowed to be higher than 625ohm.

2) Using a bypass capacitor ( $C_{ADJ}$ ) between the ADJ pin and ground can improve ripple rejection. This bypass capacitor prevents ripple from being amplified as the output voltage is increased. The impedance of  $C_{ADJ}$  should be less than  $R_1$  to prevent ripple from being amplified. As  $R_1$  is normally in the range of 100Ω~500Ω, the value of  $C_{ADJ}$  should satisfy this equation:  $1/(2\pi \times f_{ripple} \times C_{ADJ}) < R_1$ .

### Thermal Considerations

We have to take heat dissipation into great consideration when output current or differential voltage of input and output voltage is large. Because in such cases, the power dissipation consumed by HL1117A is very large. HL1117A series uses SOT-223 package type and its thermal resistance is about 20°C/W. And the copper area of application board can affect the total thermal resistance. If copper area is 5cm\*5cm (two sides), the resistance is about 30°C/W. So the total thermal resistance is about 20°C/W + 30°C/W. We can decrease total thermal resistance by increasing copper area in application board. When there is no good heat dissipation copper are in PCB, the total thermal resistance will be as high as 120°C/W, then the power dissipation of HL1117A could allow on itself is less than 1W. And furthermore, HL1117A will work at junction temperature higher than 125°C under such condition and no lifetime is guaranteed.




# HL1117A

## 1A Bipolar Linear Regulator


### Typical Performance Characteristics

$T_A=25^{\circ}\text{C}$ , unless otherwise noted


#### Line Regulation vs. Junction Temperature

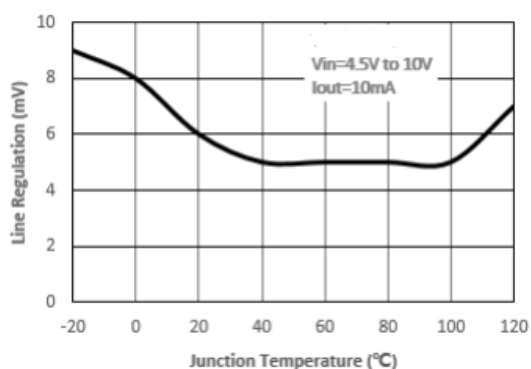


#### Load Regulation vs. Junction Temperature

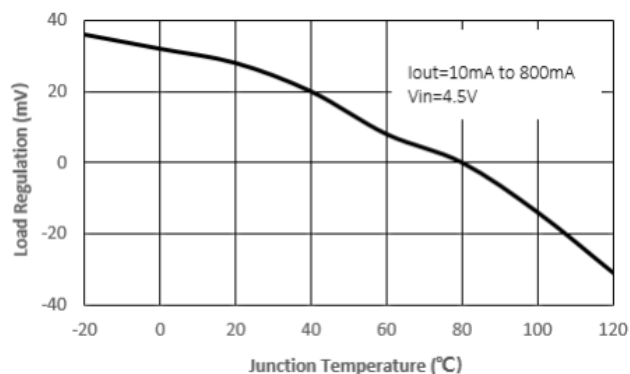


#### Reference Voltage vs. Junction Temperature

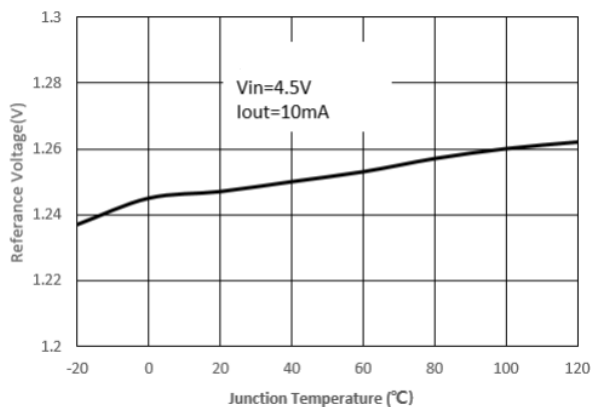


#### Output Voltage vs. Junction Temperature

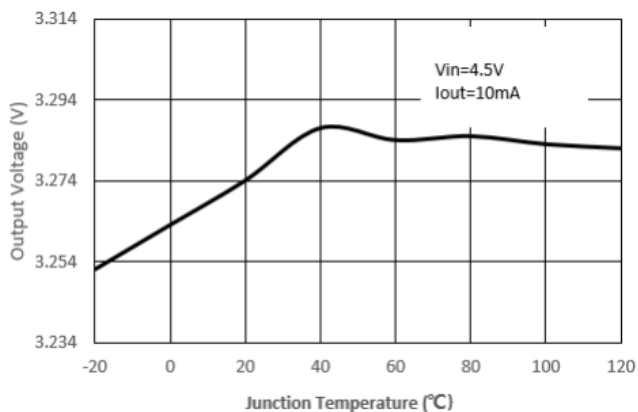

#### Minimum Load Current vs. Junction Temperature

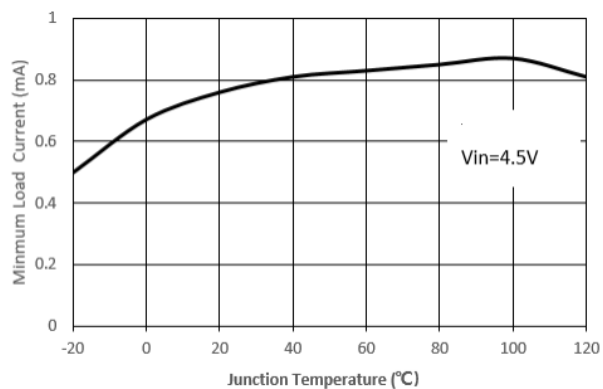

#### Adjust Pin Current vs. Junction Temperature

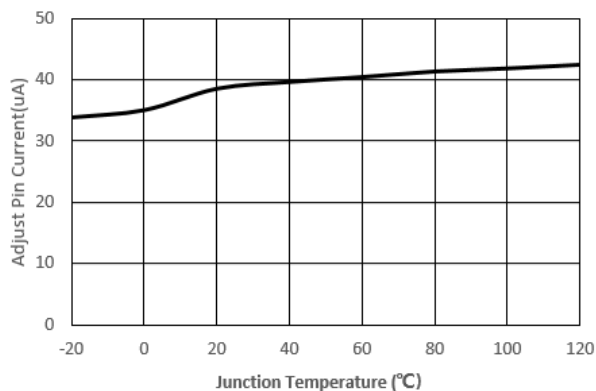







# HL1117A

## 1A Bipolar Linear Regulator


Line Transient Response

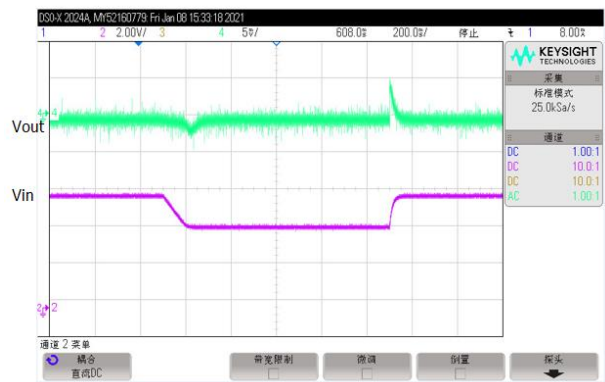

Load Transient Response

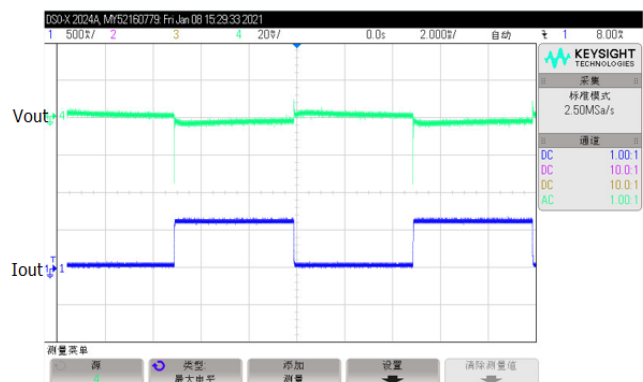

PSRR vs. Frequency

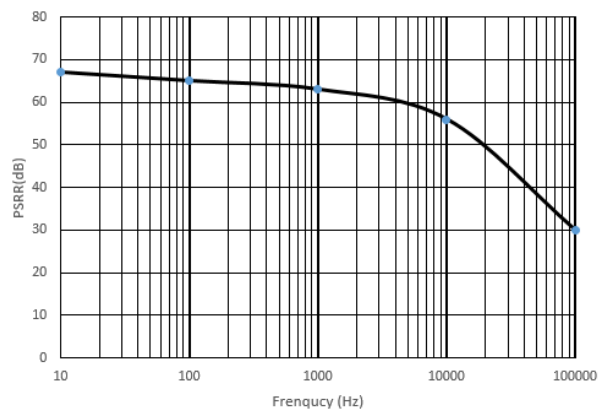




# HL1117A

## 1A Bipolar Linear Regulator

### Package Information


SOT-223 PACKAGE OUTLINE DIMENSIONS

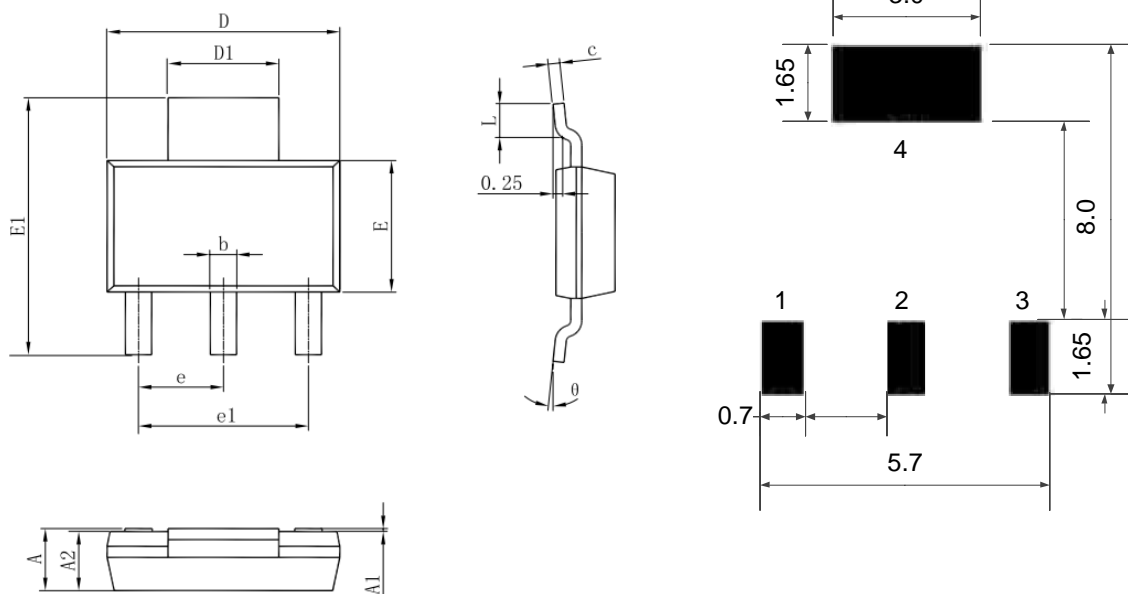

PCB Board


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.520	1.800	0.060	0.071
A1	0.000	0.100	0.000	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.820	0.026	0.032
c	0.250	0.350	0.010	0.014
D	6.200	6.400	0.244	0.252
D1	2.900	3.100	0.114	0.122
E	3.300	3.700	0.130	0.146
E1	6.830	7.070	0.269	0.278
e	2.300(BSC)		0.091(BSC)	
e1	4.500	4.700	0.177	0.185
L	0.900	1.150	0.035	0.045
θ	0°	10°	0°	10°

### TO-252-2L PACKAGE OUTLINE DIMENSIONS

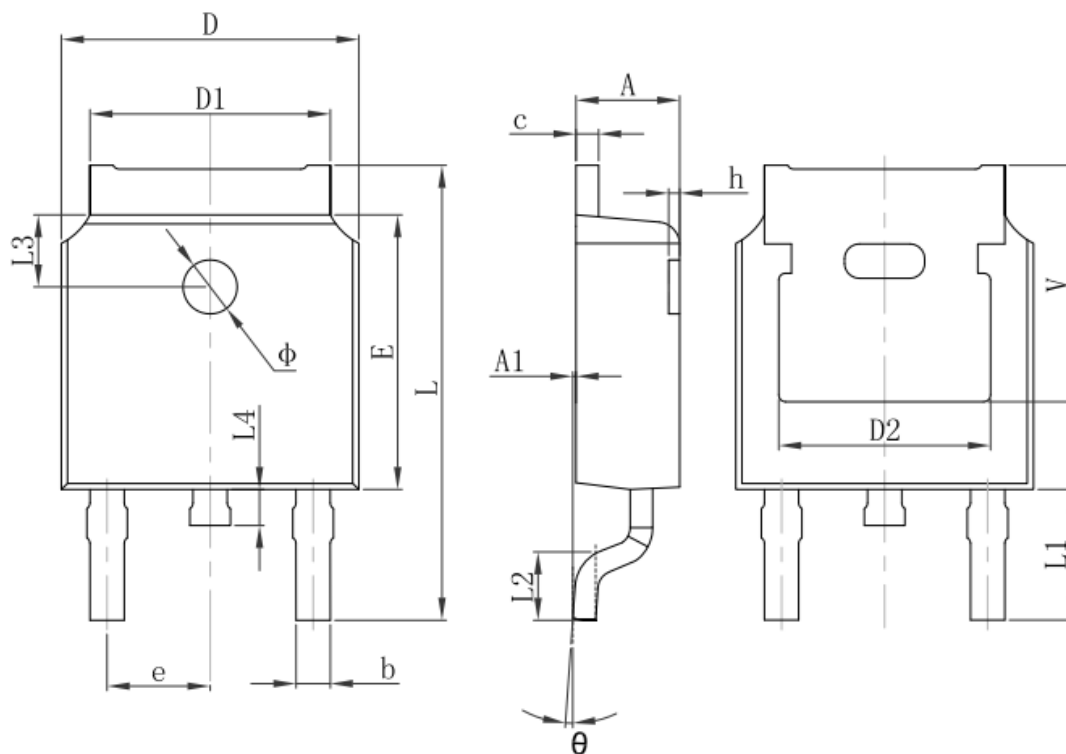

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.660	0.860	0.026	0.034
c	0.460	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.800	10.400	0.386	0.409
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
$\Phi$	1.100	1.300	0.043	0.051
$\theta$	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.350 REF.		0.211 REF.	

### SOT89 PACKAGE OUTLINE DIMENSIONS

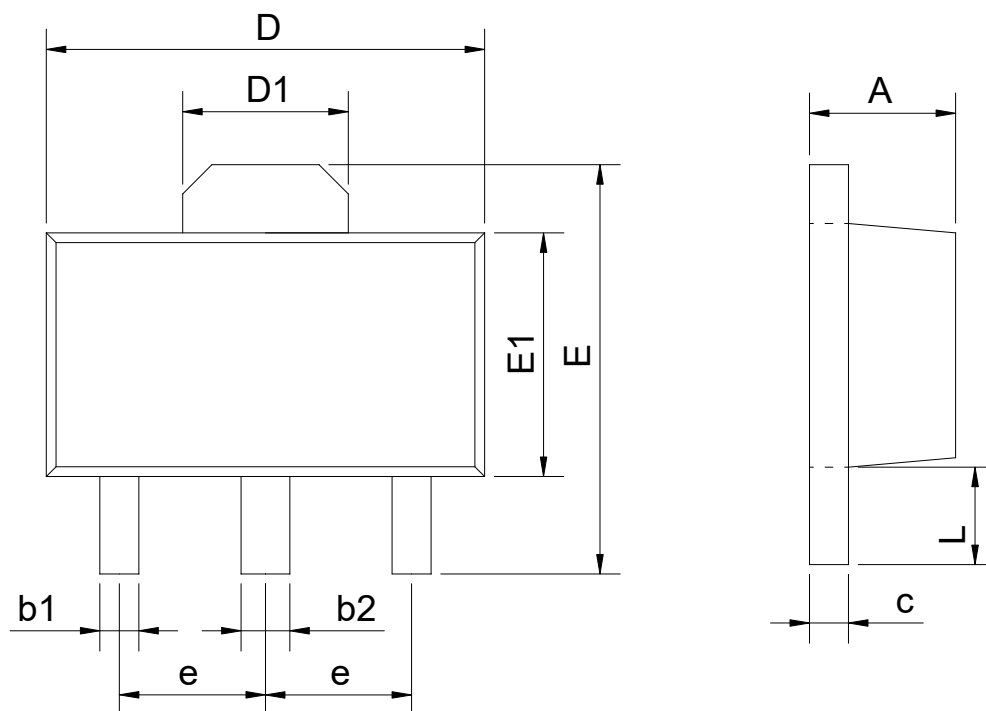

SYMBOL	mm	
	min	max
A	1.40	1.60
b1	0.35	0.50
b2	0.45	0.60
c	0.36	0.46
D	4.30	4.70
D1	1.40	1.80
E	4.00	4.40
E1	2.30	2.70
e	1.50BSC	
L	0.80	1.20